

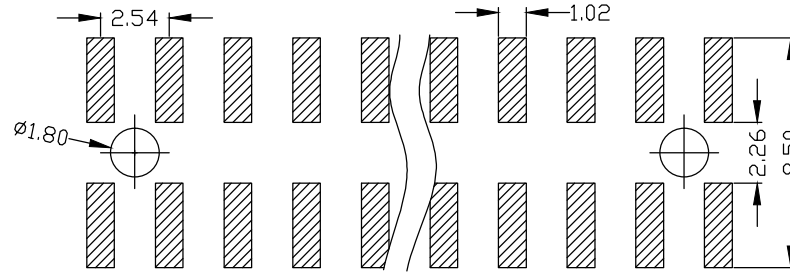
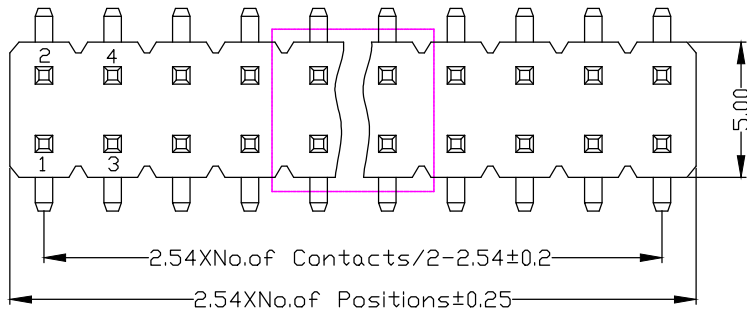


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

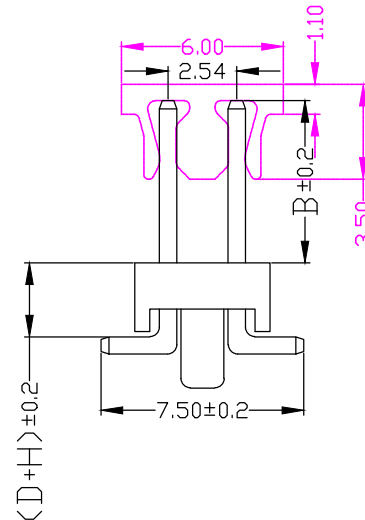

Recommended P.C.B. Layout

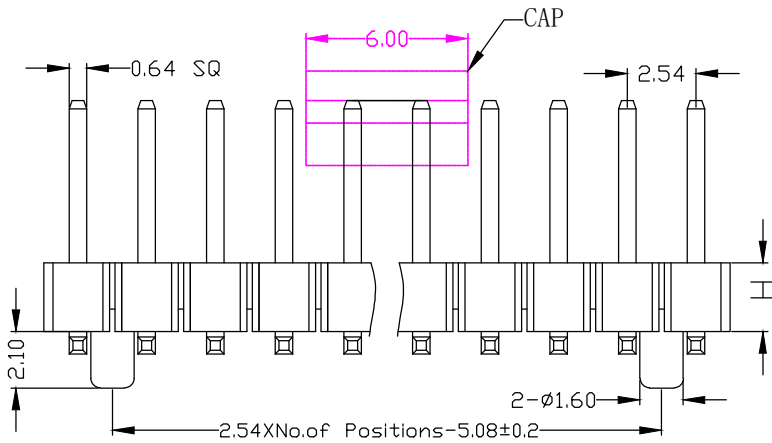

Std. Material

Contact: Brass
 Contact Plating: 0.8u" Au over 30u" Ni Min.
 Insulator: PA6T(UL94V-0).
 Insulator Colour: Black

Temperature

Operating Temp.: -40°C to 105°C
 Max. Processing Temp.: 260°C for 10s

Electronic Specifications

Current Rating : 3 AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 1000MΩ Min.
 Withstanding Voltage : AC 1000V for 60s

Packing : Tape&Reel or agree on _____

Ordering Information

No. of Pins	Contact Plating		Insulator Material	
	Rows*Pins	SN: Tin <input type="checkbox"/>	G0: 0.8u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/>
2 x 40	G1: 1u" Gold <input type="checkbox"/>	G2: 1.5u" Gold <input type="checkbox"/>	C: PA9T <input type="checkbox"/>	D: PA66 <input type="checkbox"/>
Ordering:(N)	G3: 2u" Gold <input type="checkbox"/>	G4: 3u" Gold <input type="checkbox"/>	E: PA46 <input type="checkbox"/>	F: LCP <input type="checkbox"/>
2 X <input type="checkbox"/>	G5: __u" Gold <input type="checkbox"/>		G: _____ <input type="checkbox"/>	

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

ITEM	B		H				D	
Standard	6.0	1.5	1.7	2.0	2.54	3.0	0.2	0.6
Alternate								

UNLESS OTHERWISE STATED
 DIMENSIONS IN mm
 TOLERANCE:

ANGLEAR ±1°	LINEAR	X 0.5
		X.X ±0.2
		X.XX ±0.1

DATE:2020.12.19



深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.

SERIES: PH2.54/Dual Row/SMT

TYPICAL MODEL: 2.54mm 双排针 SMT 带柱

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		