






RoHS Compliant


Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19





<60.64PIN>三个缺口, 两个窗口

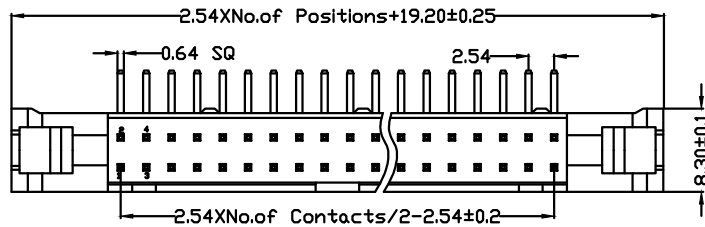

<20.24.26.30 34.40.50PIN>
一个缺口, 两个窗口



<10 14 16PIN>一个缺口

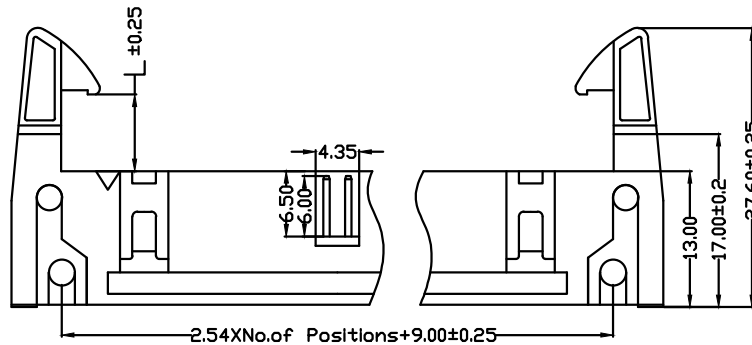

Std. Material

Contact: Brass
Contact Plating: 0.8u" Au over 30u" Ni Min.
Insulator: PBT(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40°C to 105°C
Max. Processing Temp.: 140°C

Electronic Specifications

Current Rating : 3 AMP
Contact Resistance : 20mΩ Max.
Insulation Resistance : 1000MΩ Min.
Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 40	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>
Ordering:(N) 2 X <input type="checkbox"/>		

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:		ORIGINALLY BY
		DRAWN: FHY
ANGLEAR ±1°	LINEAR X 0.5	CHECKED: FY
	X.X ±0.2	APPROVED: FY
	X.XX ±0.1	DATE:2020.12.19



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.



SERIES: EH2.54/Long&Short Latch/Right Angle

TYPICAL MODEL: 12.54mm 牛角 90度

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
Customer P/N:		