



RoHS Compliant


Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19





Long Latch (长耳)
L1=8.00




Short Latch (短耳)
L2=4.35

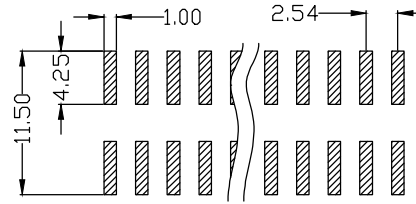


Recommended P.C.B. Layout

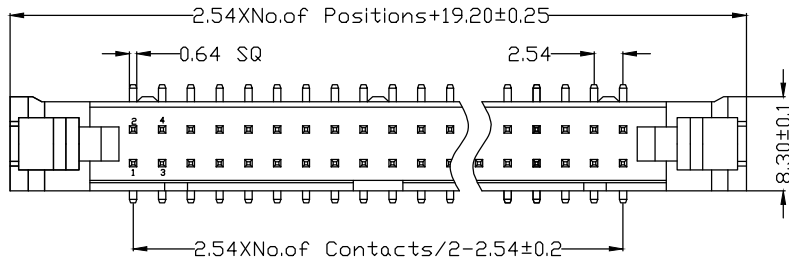



<10 14 16PIN>
一个缺口



<20,24,26,30
34,40,50PIN>
一个缺口,
两个窗口



<60,64PIN>
三个缺口,
两个窗口

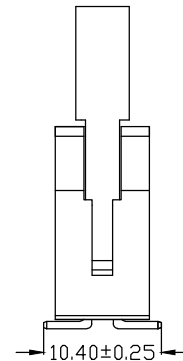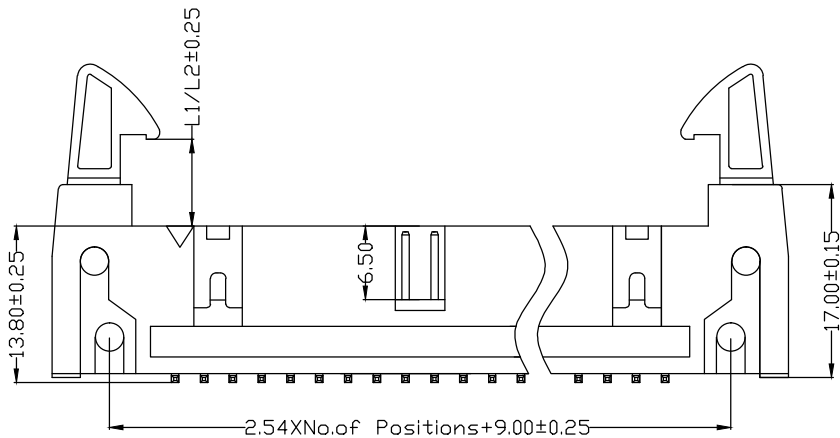

Std. Material

Contact: Brass
Contact Plating: 0.8u" Au over 30u" Ni Min.
Insulator: PA6T(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40°C to 105°C
Max. Processing Temp.: 260°C for 10s

Electronic Specifications

Current Rating : 3 AMP
Contact Resistance : 20mΩ Max.
Insulation Resistance : 1000MΩ Min.
Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating		Insulator Material	
	Rows*Pins	SN: Tin	<input type="checkbox"/>	A: PBT
2 x 40	G0: 0.8u" Gold	<input type="checkbox"/>	B: PA6T	<input type="checkbox"/>
Ordering:(N) 2 X <input type="checkbox"/>	G1: 1u" Gold	<input type="checkbox"/>	C: PA9T	<input type="checkbox"/>
	G2: 1.5u" Gold	<input type="checkbox"/>	D: PA66	<input type="checkbox"/>
	G3: 2u" Gold	<input type="checkbox"/>	E: PA46	<input type="checkbox"/>
	G4: 3u" Gold	<input type="checkbox"/>	F: LCP	<input type="checkbox"/>
	G5: __u" Gold	<input type="checkbox"/>	G: _____	<input type="checkbox"/>

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE:2020.12.19
	X.X ±0.2	
	X.XX ±0.1	



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.



SERIES: EH2.54/Long&Short Latch/SMT
TYPICAL MODEL: 2.54mm 牛角 PA6T SMT L=16.5

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		