




RoHS Compliant


Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

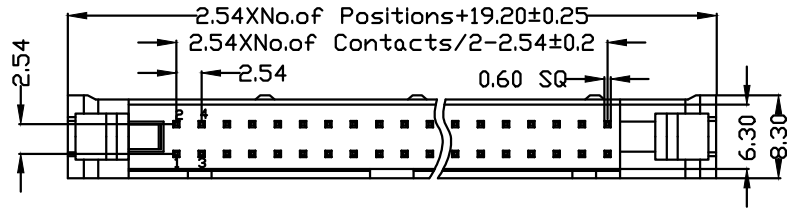




Long Latch
L=8.00



Short Latch
L=4.35

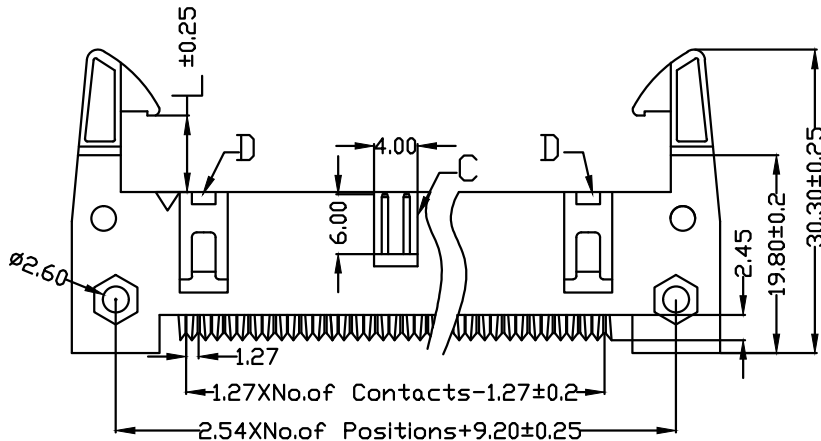

10P-18P With "C" Without "D"
20P-64P With "C" and "D"

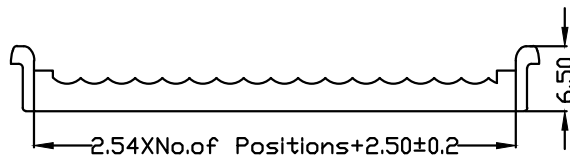

Std. Material
 Contact: Brass
 Contact Plating: 0.8u" Au over 30u" Ni Min.
 Insulator: PBT(UL94V-0).
 Insulator Colour: Black

Temperature
 Operating Temp.: -40°C to 105°C
 Max. Processing Temp.: 140°C

Electronic Specifications
 Current Rating : 3 AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 1000MΩ Min.
 Withstanding Voltage : AC 1000V for 60s
Packing : Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins	SN: Tin <input type="checkbox"/>	A: PBT <input type="checkbox"/>
2 x 40	G0: 0.8u" Gold <input type="checkbox"/>	B: PA6T <input type="checkbox"/>
Ordering:(N)	G1: 1u" Gold <input type="checkbox"/>	C: PA9T <input type="checkbox"/>
2 X <input type="checkbox"/>	G2: 1.5u" Gold <input type="checkbox"/>	D: PA66 <input type="checkbox"/>
	G3: 2u" Gold <input type="checkbox"/>	E: PA46 <input type="checkbox"/>
	G4: 3u" Gold <input type="checkbox"/>	F: LCP <input type="checkbox"/>
	G5: ___u" Gold <input type="checkbox"/>	G: _____ <input type="checkbox"/>

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	ZWON
	DRAWN: FHY	深圳市征华电子有限公司
	CHECKED: FY	Shenzhen ZWON Electronics Co.,Ltd.
	APPROVED: FY	SERIES: EH2.54/Pressing Wire
ANGLEAR ±1°	DATE:2020.12.19	TYPICAL MODEL: 2.54mm 牛角 压线式 刺破不带锁



深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.
 SERIES: EH2.54/Pressing Wire
 TYPICAL MODEL: 2.54mm 牛角 压线式 刺破不带锁

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		