

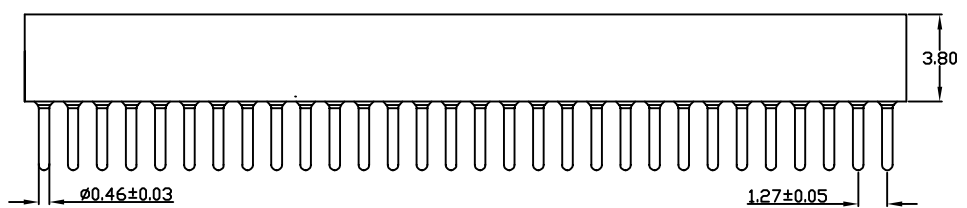


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

Material:  
 Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Clip(contact 6 fingers):Beryllium Copper,heat treated  
 Plating(outer sleeve):  
 Tin plated:2μm/80u”Ni,5μm/200u”Sn  
 Gold Plated:2μm/80u”Ni,Full gold  
 Plating(contact):2μm/80u”Ni,Gold or Tin plated  
 Insulator(black):Glass filled thermoplastic polyester  
 UL94V-0

Electrical:  
 Current rating:1Amps/contact max.  
 Contact resistance: ≤4mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Operating voltage: 60V AC/DC

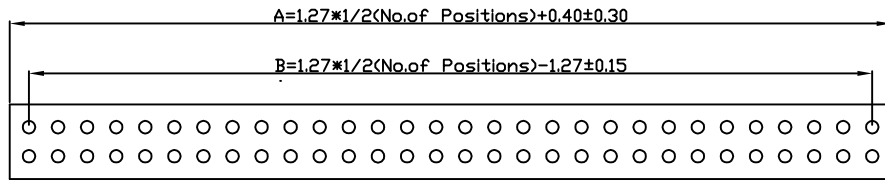

UNLESS OTHERWISE STATED		ORIGINALLY BY	<b>ZWON</b>
DIMENSIONS IN mm		DRAWN: FHY	
TOLERANCE:		CHECKED: FY	扫描 官网 发现 更多
ANGLEAR ±1°	LINEAR	APPROVED: FY	
	X 0.5	DATE:2020.12.19	
	X.X ±0.2		
	X.XX ±0.1		

深圳市征华电子有限公司  
 Shenzhen ZWON Electronics Co.,Ltd.  
 SERIES: 1.27 SIP Socket/Straight  
 TYPICAL MODEL: 1.27mm Pitch SIP Sockets DIP L6.8

Drawing No.		DRXXX-XX	
Scale	Revision	Sheet	
FIT	A	1 of 1	
ZWON P/N:			
Customer P/N:			