


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

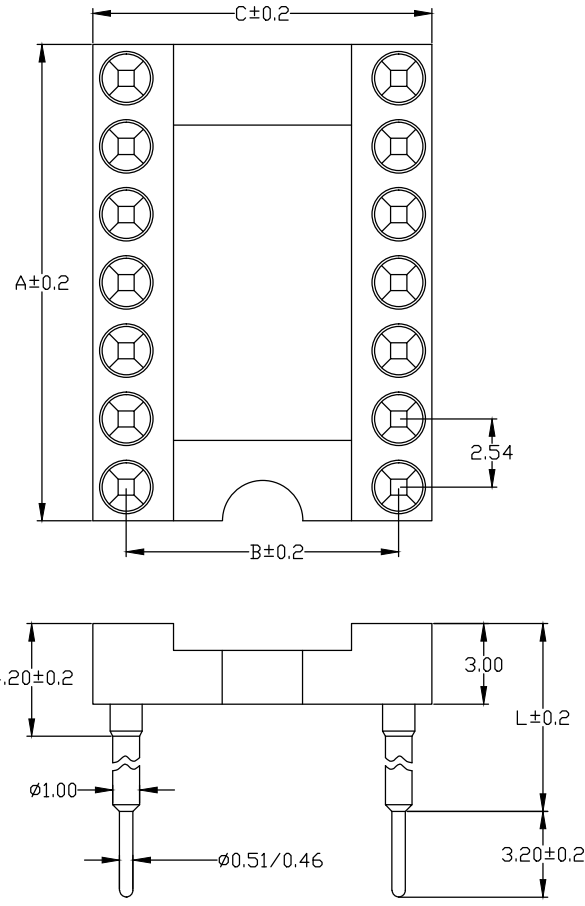

Contact length L:
6mm, 7mm, 8mm, 9mm, 10mm,
11mm, 12mm, 13mm, 15mm,
18mm, 22mm, 33mm

See page	No. of Positions	A	B	C
fig. 1	6	7.6	7.62	10.1
fig. 2	8	10.1	7.62	10.1
fig. 3	10	12.6	7.62	10.1
fig. 4	12	15.2	7.62	10.1
fig. 5	14	17.7	7.62	10.1
fig. 6	16	20.3	7.62	10.1
fig. 7	18	22.8	7.62	10.1
fig. 8	20	25.3	7.62	10.1
fig. 9	22	27.8	7.62	10.1
fig. 10	24	30.4	7.62	10.1
fig. 11	28	35.5	7.62	10.1
fig. 12	20	25.4	10.16	12.6
fig. 13	22	27.8	10.16	12.6
fig. 14	24	30.4	10.16	12.6
fig. 15	28	35.5	10.16	12.6
fig. 16	32	40.6	10.16	12.6
fig. 17	24	30.5	15.24	17.7
fig. 18	28	35.5	15.24	17.7
fig. 19	32	40.6	15.24	17.7
fig. 20	36	45.7	15.24	17.7
fig. 21	40	50.8	15.24	17.7
fig. 22	42	53.3	15.24	17.7
fig. 23	48	60.9	15.24	17.7
fig. 24	50	63.5	15.24	17.7
fig. 25	52	66.0	15.24	17.7
fig. 26	50	63.5	22.86	25.3
fig. 27	52	66.0	22.86	25.3
fig. 28	64	82.1	22.86	25.3

Std. Material
 Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cilp (4 finger): Beryllium copper (C17200)
 Mating pin ϕ : 0.40 to 0.56mm
 Forces: (polished steel gauge ϕ 0.43mm)
 -Insertion : 2 N typ.
 -Withdrawal: 1 N typ.
 Mechanical life : min 100 cycles
 Rated current : 1Amp
 Contact resistance: Max 10m Ω
 Dielectric resistance : Min 1000V_{RMS}

Temperature
 Operating Temp. : -40 $^{\circ}$ C to 105 $^{\circ}$ C
 Max. Processing Temp.: 260 $^{\circ}$ C for 10s

Packing : Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 40	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>
Ordering:(N) 2 X <input type="checkbox"/>		

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED
 DIMENSIONS IN mm
 TOLERANCE:

ANGLEAR $\pm 1^{\circ}$	LINEAR X 0.5 X.X ± 0.2 X.XX ± 0.1
-------------------------	---

ORIGINALLY BY: **ZWON**
 DRAWN: FHY
 CHECKED: FY
 APPROVED: FY
 DATE: 2020.12.19

扫码官网 发现更多

深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.

Drawing No. DRXXX-XX
 Scale: FIT, Revision: A, Sheet: 1 of 1

SERIES: 2.54 Round IC Socket/Straight
 TYPICAL MODEL: 2.54圆孔 IC座 塑高3.0 180度 Type2

Customer P/N: