
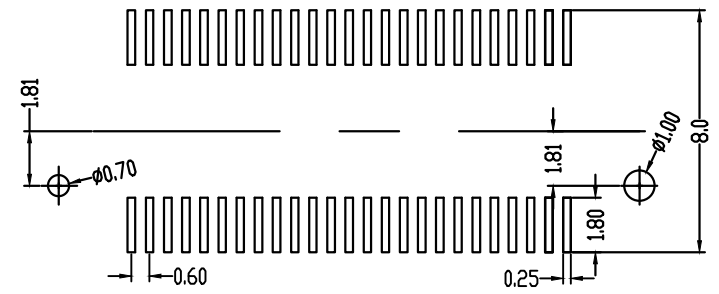


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

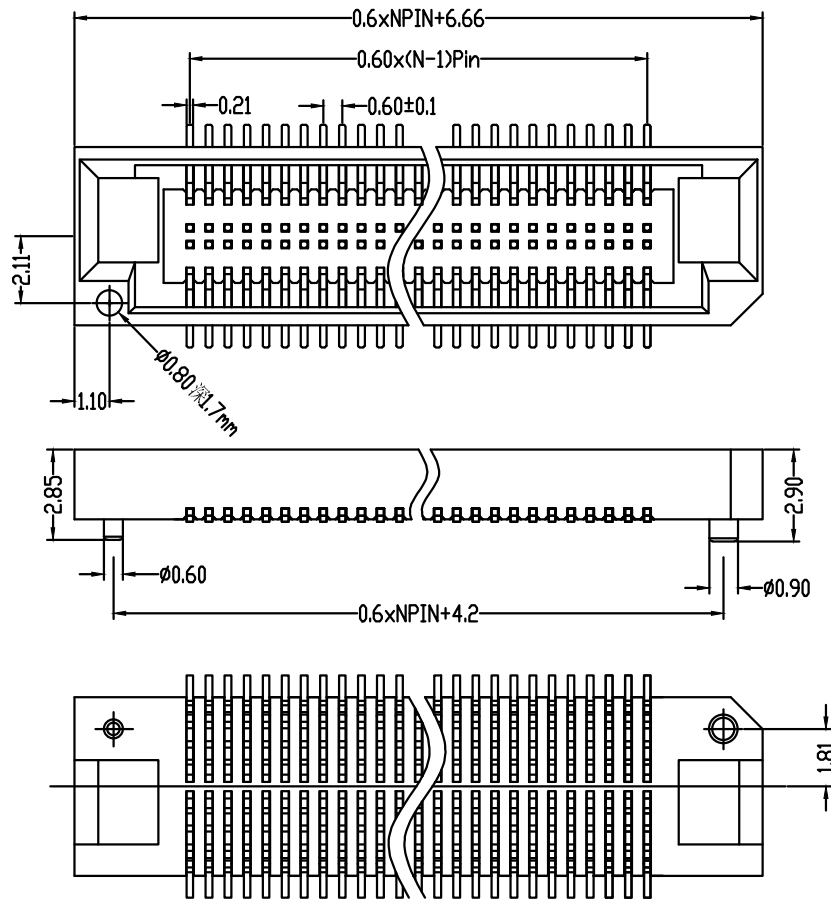

Recommended P.C.B. Layout

SPECIFICATIONS  
 PERFORMANCE  
 Electrical Rating: AC/DC 50V 0.5A  
 Insulation Resistance: 500MΩ  
 Withstand Volt: 200V AC/minute  
 Operating Temperature: -25° to +85°

Material:  
 Contact: Phosphor Bronze Gold-Plated  
 Housing: LCP

UNLESS OTHERWISE STATED		ORIGINALLY BY	<b>ZWON</b>	深圳市征华电子有限公司 Shenzhen ZWON Electronics Co.,Ltd.
DIMENSIONS IN mm		DRAWN: FHY		
TOLERANCE:		CHECKED: FY	扫描官网	发现更多
ANGLEAR $\pm 1^\circ$	LINEAR	APPROVED: FY		
	X 0.5 X.X $\pm 0.2$ X.XX $\pm 0.1$	DATE: 2020.12.19		

Drawing No.	DRXXX-XX	
	Scale	Revision
FIT	A	Sheet 1 of 1
SERIES: 0.60 BTB/Male/Single Slot/SMT		ZWON P/N:
TYPICAL	0.60mm BTB公头 单槽 合高2.88	Customer P/N:
MODEL:	SMT 带大小柱	