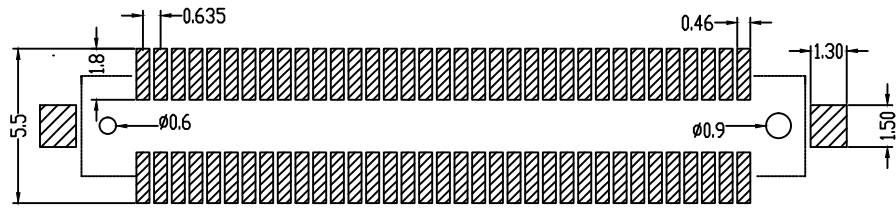


RoHS Compliant

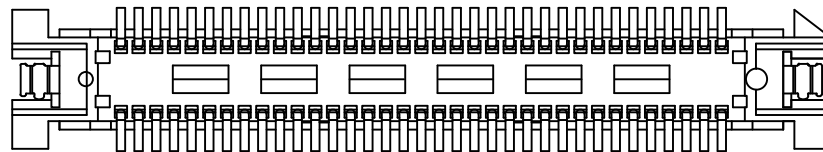

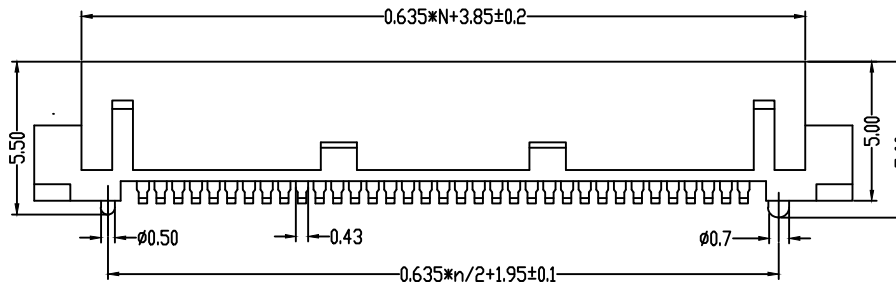

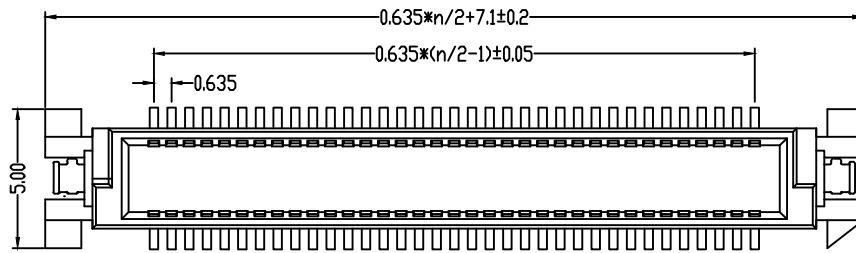
Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19





PERFORMANCE

Electrical Rating: AC/DC 50V 0.5A
 Insulator Resistanc: 500mΩ
 Withstand Volt: 200V AC/minute
 Operating Temperature:-25° to+85°

Contact: Phosphor Bronze Gold-Plated
 Housing: LCP



UNLESS OTHERWISE STATED		ORIGINALLY BY	 
DIMENSIONS IN mm		DRAWN: FHY	
TOLERANCE:		CHECKED: FY	
		APPROVED: FY	
ANGULAR	LINEAR	DATE:2020.12.19	
±1°	X 0.5		
	X.X ±0.2		
	X.XX ±0.1		

深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.

SERIES: 0.635 BTB/Female/Single Slot/SMT
 TYPICAL 0.635mm BTB 母头 单槽
 MODEL: SMT 带大小柱

Drawing No.		DRXXX-XX
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		