

RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

ORDERING INFORMATION

NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
32	64	2.54	a b	
16	32		a-	
16	32	5.08 HALF-LOADED	a b ALL EVEN NO.	

Std. Material

Contact: Brass  
 Contact Plating: 0.8u" Au over 30u" Ni Min.  
 Insulator: PBT(UL94V-0).  
 Insulator Colour: Black

Temperature

Operating Temp.: -40°C to 105°C  
 Max. Processing Temp.: 140°C

Electronic Specifications

Current Rating : 3 AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance : 1000MΩ Min.  
 Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on \_\_\_\_\_





Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 32	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>
Ordering:(N) 2 X		

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

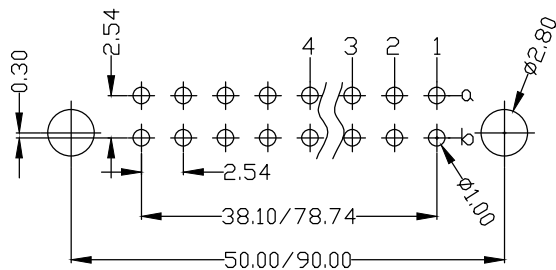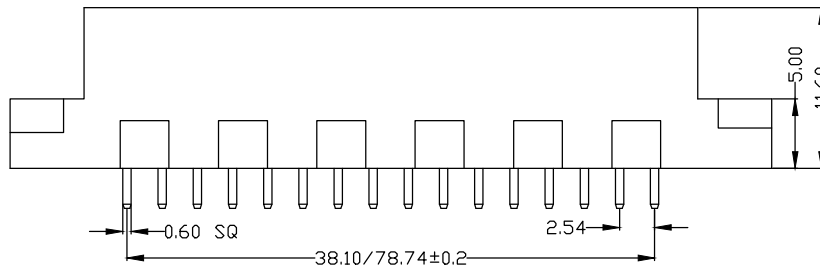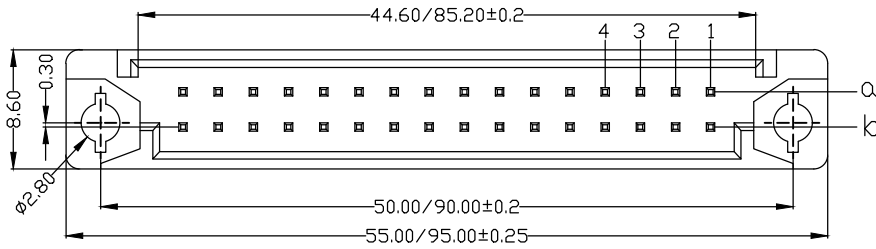

Recommended P.C.B. Layout

DTM"A"	2.50	4.00
--------	------	------

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	ZWON
	DRAWN: FHY	深圳市征华电子有限公司
	CHECKED: FY	Shenzhen ZWON Electronics Co.,Ltd.
	APPROVED: FY	SERIES: European Socket/Dual Row/Straight
ANGLEAR ±1°	LINEAR X 0.5 X.X ±0.2 X.XX ±0.1	DATE:2020.12.19



Drawing No.	DRXXX-XX
Scale	Revision
FIT	A
Sheet	1 of 1
ZWON P/N:	
Customer P/N:	

TYPICAL MODEL: 欧式插座 双排 180度 公座